



NEMA Premium

NEMA

MOTOR MODEL:	BR3-CI-TF-324TC-4-BR-E-40
FACTORY TYPE:	TXC

Premium NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	40.0	40.0
Speed, RPM	1770	1460
Voltage	460	380
# Phase	3	
Full Load Amps	47.1	-
Power Factor	0.86	-
Nominal Efficiency	94.1	91.5
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
KVA Code	L	F
FL Amps. @ 208 V	-	-
Locked Rotor Current	496.313	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	12	
Connection	DD/D	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	93.22	0.73
75%	93.77	0.82
100%	93.48	0.86
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	78.0	-
3D Image Link		
BR3-CI-TF-324TC-4-BR-E-40		

GENERAL DATA				
Frame Size	324TC			
Frame Enclosure	TEFC			
Mounting	Rigid/C-Flange			
Insulation Class	F			
Duty	Cont. / S1			
NEMA Design	A			
Frame Material	Cast Iron			
Ingress Protection	56			
Tropicalization	true			
Cable Entry	1-NPT 2"			
Feet Removable	true			
Double Drilled	-			
Paint Color	Graphite Gray			
Paint RAL	7024			
Weight lb	539.122			
MECHANICAL DATA				
DE Bearing	6312C3			
NDE Bearing	6312C3			
dB No-Load	-			
Rotor Wk ² , Lb-Ft ²	-			
Comp Ring (wavey washer)	-			
TORQUE VALUES			Torque lb-ft	% FLT
Locked Rotor Torque	430.673	317.0		
Pull-Up Torque	249.98	184.0		
Breakdown Torque	400.784	295.0		
Full Load Torque	135.859	100.0		
SITE CONDITIONS				
Ambient Temp °C	40			
Altitude Above Sea Level m	1000			

*This report valid for above Date Code and newer models, please contact Techttop for more info.

Techtop Industries
2815 Colonnades Court
Peachtree Corners, GA 30071
Tel: 678-436-5540
E-Mail: info@techttopind.com



NEMA Premium


NEMA

MOTOR MODEL:	BR3-CI-TF-324TC-4-BR-E-40
FACTORY TYPE:	TXC

Premium NEMA Cast Iron, TEFC

Non Sinusoidal (VFD) Output 40.0HP, 1770 RPM

Torque Speed (T-n) Curve

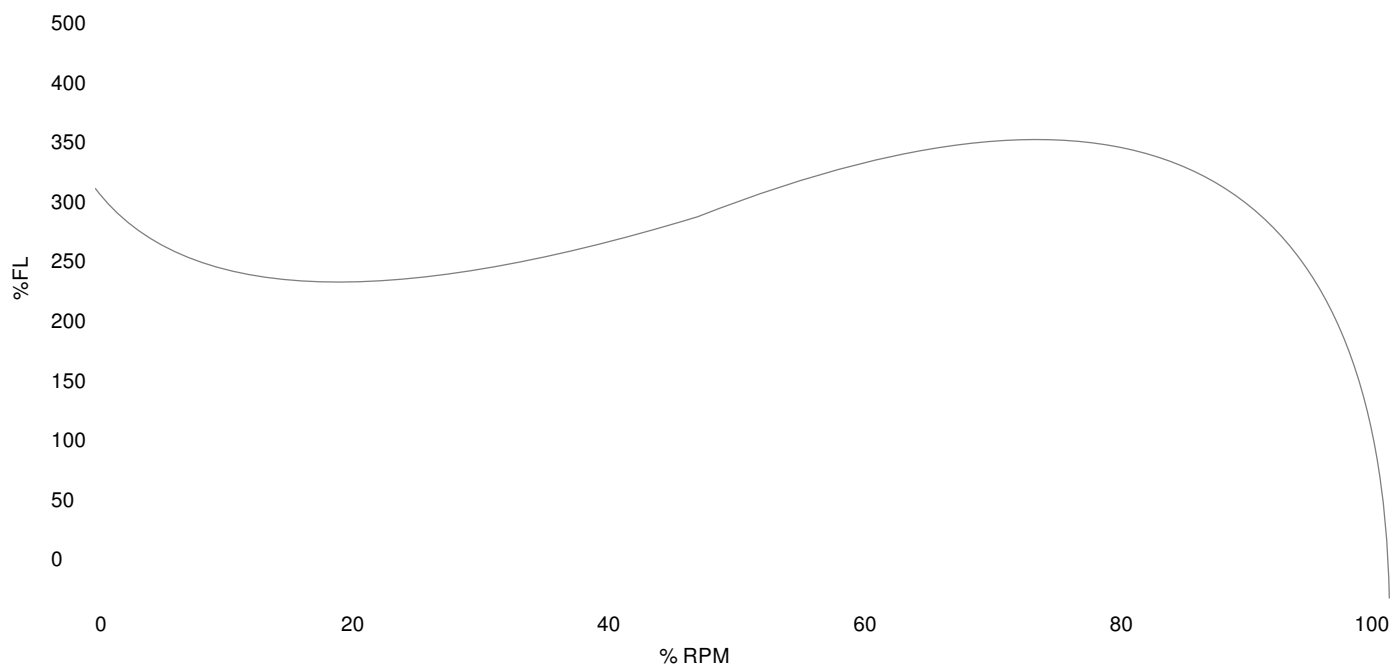

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	430.673	317.0	Start Configuration
Pull-Up Torque	249.98	184.0	Starting Current (A)
Breakdown Torque	400.784	295.0	No-Load Current (A)
Full Load	135.859	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	20.61	-	-	-	-
25	10.0	23.81	9.61	1795.1	89.75	0.51
50	20.0	31.86	18.5	1790.4	93.22	0.73
75	30.0	42.04	27.59	1785.3	93.77	0.82
100	40.0	53.83	36.91	1779.7	93.48	0.86
125	50.0	66.72	46.47	1773.8	92.81	0.87

Techtop Industries
 2815 Colonnades Court
 Peachtree Corners, GA 30071
 Tel: 678-436-5540
 E-Mail: info@techttopind.com