



NEMA Premium

NEMA

MOTOR MODEL:	BR3-CI-TF-445TC-4-BR-E-150
FACTORY TYPE:	TXC

Premium NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	150.0	150.0
Speed, RPM	1780	1480
Voltage	460	380
# Phase	3	
Full Load Amps	166.595569	200
Power Factor	0.88	-
Nominal Efficiency	95.8	94.3
3/4 Load Efficiency	-	-
Service Factor	1.15	1.0
KVA Code	H	D
FL Amps. @ 208 V	-	-
Locked Rotor Current	1941.71	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	6	
Connection	D	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	94.76	0.77
75%	95.48	0.85
100%	95.52	0.88
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	60.0	-
3D Image Link		
BR3-CI-TF-445TC-4-BR-E-150		

GENERAL DATA			
Frame Size	445TC		
Frame Enclosure	TEFC		
Mounting	Rigid/C-Flange		
Insulation Class	F		
Duty	Cont. / S1		
NEMA Design	A		
Frame Material	Cast Iron		
Ingress Protection	56		
Tropicalization	true		
Cable Entry	1-NPT 3"		
Feet Removable	-		
Double Drilled	true		
Paint Color	Graphite Gray		
Paint RAL	7024		
Weight lb	1631.7		
MECHANICAL DATA			
DE Bearing	6319C3		
NDE Bearing	6319C3		
dB No-Load	-		
Rotor Wk ² , Lb-Ft ²	-		
Comp Ring (wavey washer)	-		
TORQUE VALUES		Torque lb-ft	% FLT
Locked Rotor Torque		1962.2	455.0
Pull-Up Torque		983.256	228.0
Breakdown Torque		2005.32	465.0
Full Load Torque		431.253	100.0
SITE CONDITIONS			
Ambient Temp °C		40	
Altitude Above Sea Level m		1000	

*This report valid for above Date Code and newer models, please contact Techtop for more info.

Techtop Industries
 2815 Colonnades Court
 Peachtree Corners, GA 30071
 Tel: 678-436-5540
 E-Mail: info@techttopind.com



NEMA Premium


MOTOR MODEL:	BR3-CI-TF-445TC-4-BR-E-150
FACTORY TYPE:	TXC

NEMA

Premium NEMA Cast Iron, TEFC

Non Sinusoidal (VFD) Output 150.0HP, 1780 RPM

Torque Speed (T-n) Curve

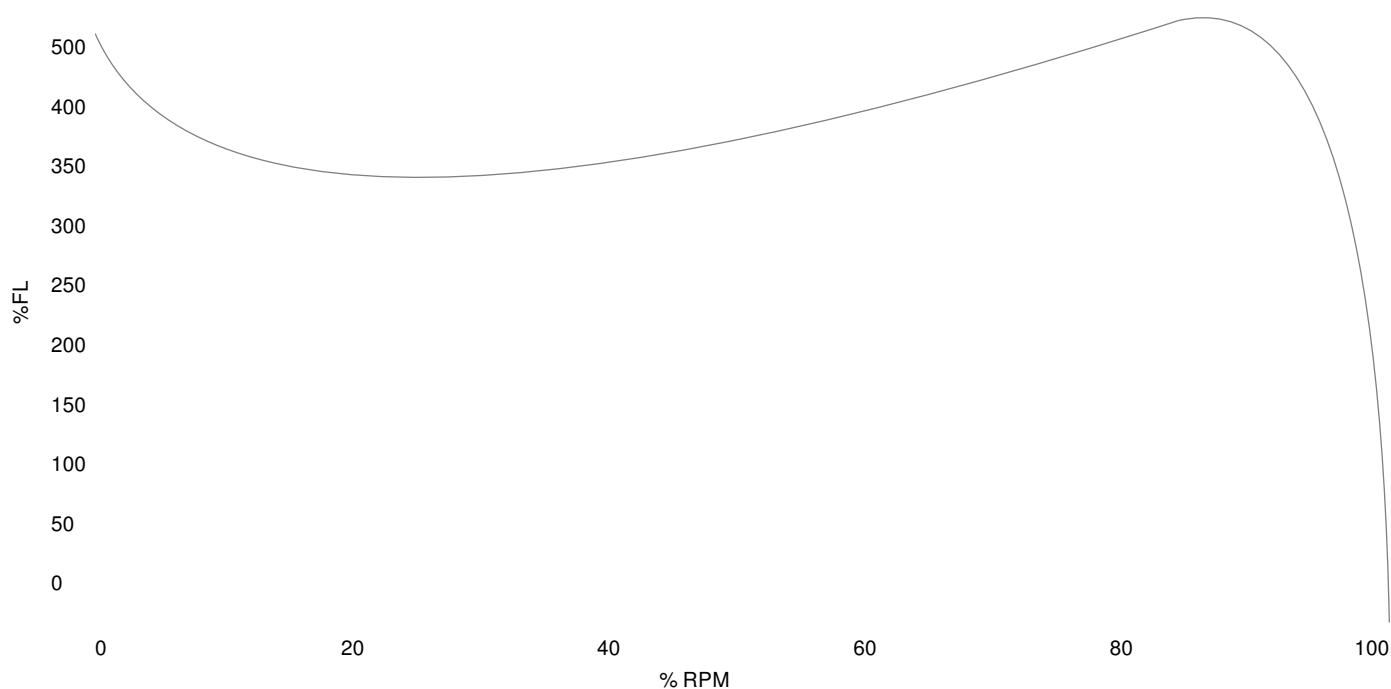

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	1962.2	455.0	Start Configuration
Pull-Up Torque	983.256	228.0	Starting Current (A)
Breakdown Torque	2005.32	465.0	No-Load Current (A)
Full Load	431.253	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	65.07	-	-	-	-
25	37.5	78.63	34.53	1797.4	91.59	0.55
50	75.0	109.21	66.75	1794.9	94.76	0.77
75	112.5	146.37	99.37	1792.3	95.48	0.85
100	150.0	187.92	132.44	1789.6	95.52	0.88
125	187.5	214.06	152.51	1787.9	95.39	0.89

Techtop Industries
 2815 Colonnades Court
 Peachtree Corners, GA 30071
 Tel: 678-436-5540
 E-Mail: info@techttopind.com