

DLE4.8CNT
Energy-optimized Tropical Compressor
R290
220-240V 50Hz

General

Code number	102H4588
Approvals	–
Compressors on pallet	100

Application

Application		LBP/MBP	
Frequency	Hz	50	60
Evaporating temperature	°C	-35 to 7.2	–
Voltage range	V	187 to 254	–
Max. condensing temperature continuous (short)	°C	65 (65)	–
Max. winding temperature continuous (short)	°C	125 (135)	–

Cooling requirements

Frequency	Hz	50			60		
Application		LBP	MBP	HBP	LBP	MBP	HBP
32°C		F ₂	F ₂	–	–	–	–
38°C		F ₂	F ₂	–	–	–	–
43°C		F ₂	F ₂	–	–	–	–
Remarks on application:							

Motor


Motor type		CSIR/RSIR/RSCR	
LRA (rated after 4 sec. UL984), HST LST	A	6.6	5.7
Cut in Current, HST LST	A	6.6	9.9
Resistance, main start winding (25°C)	Ω	17.6	18.5

Design

Displacement	cm ³	4.80
Oil quantity (type)	cm ³	230 (polyolester)
Maximum refrigerant charge	g	150
Free gas volume in compressor	cm ³	1390
Weight without electrical equipment	kg	8.2


Dimensions

Height	mm	A	175
		B	169
		B1	–
		B2	–
Suction connector	location/I.D. mm angle	C	8.2 18°
	material comment	Copper Rubber plug	
Process connector	location/I.D. mm angle	D	6.2 61°
	material comment	Copper Rubber plug	
Discharge connector	location/I.D. mm angle	E	6.2 25°
	material comment	Copper Rubber plug	
Oil cooler connector	location/I.D. mm angle	F	–
	material comment	–	
Connector tolerance	I.D. mm	±0.09	
Remarks:			

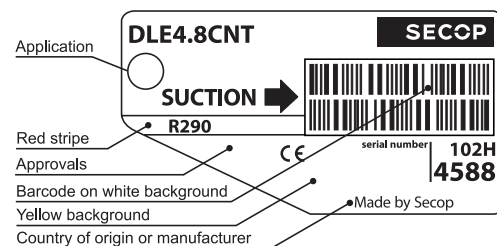

Yellow warning label

S = Static cooling normally sufficient
O = Oil cooling
F₁ = Fan cooling 1.5 m/s
(compressor compartment temperature
equal to ambient temperature)
F₂ = Fan cooling 3.0 m/s necessary
SG = Suction gas cooling normally sufficient
— = not applicable in this area

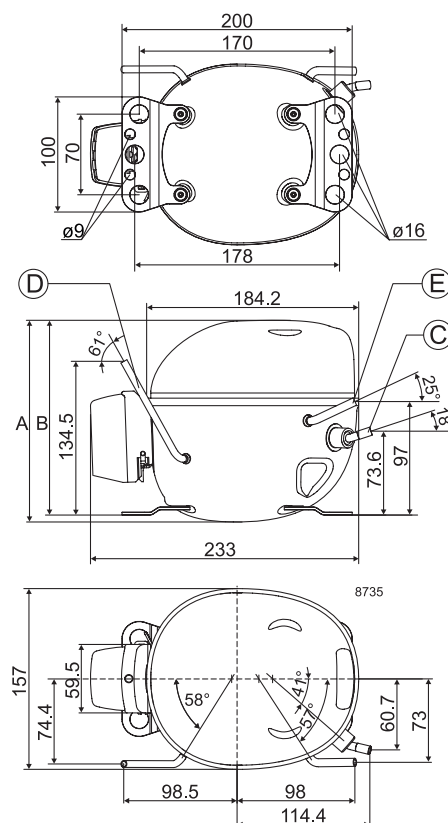

EN 12900 LBP220V, 50Hz, CSIR/RSIR, fan cooling F₂

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10	15	20
Capacity in W			115	164	214	231	268	328	398	451	480	575	687	742			
Power cons. in W			121	132	145	149	157	169	180	187	190	198	203	205			
Current cons. in A			0.86	0.90	0.95	0.96	0.99	1.03	1.06	1.08	1.09	1.12	1.14	1.14			
COP in W/W			0.96	1.24	1.48	1.56	1.71	1.94	2.21	2.41	2.53	2.91	3.38	3.63			

EN 12900 MBP220V, 50Hz, CSIR/RSIR, fan cooling F₂




Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10	15	20
Capacity in W			105	150	196	213	247	304	369	419	446	536	643	695			
Power cons. in W			123	136	150	154	164	178	191	199	203	213	221	224			
Current cons. in A			0.87	0.91	0.96	0.97	1.00	1.05	1.09	1.12	1.13	1.17	1.20	1.21			
COP in W/W			0.85	1.10	1.31	1.38	1.51	1.71	1.94	2.10	2.20	2.51	2.90	3.10			

ASHRAE LBP220V, 50Hz, CSIR/RSIR, fan cooling F₂

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10	15	20
Capacity in W			128	176	225	242	278	339	410	464	494	595	715	775			
Power cons. in W			119	134	150	155	166	183	200	210	215	229	242	246			
Current cons. in A			0.89	0.94	0.99	1.01	1.05	1.10	1.16	1.20	1.22	1.28	1.34	1.36			
COP in W/W			1.08	1.31	1.50	1.56	1.67	1.85	2.05	2.21	2.30	2.59	2.96	3.14			

ASHRAE MBP/HBP220V, 50Hz, CSIR/RSIR, fan cooling F₂

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10	15	20
Capacity in W			114	157	201	217	249	303	366	413	440	529	636	689			
Power cons. in W			118	132	148	154	165	181	197	208	213	227	239	243			
Current cons. in A			0.89	0.94	0.99	1.01	1.05	1.10	1.16	1.20	1.22	1.28	1.34	1.36			
COP in W/W			0.97	1.19	1.36	1.41	1.51	1.67	1.85	1.99	2.07	2.34	2.66	2.83			

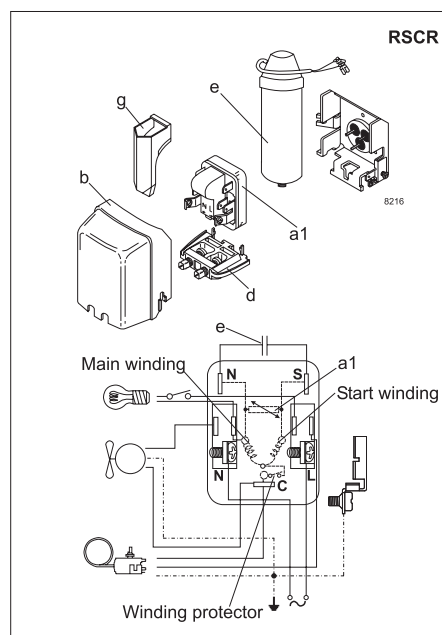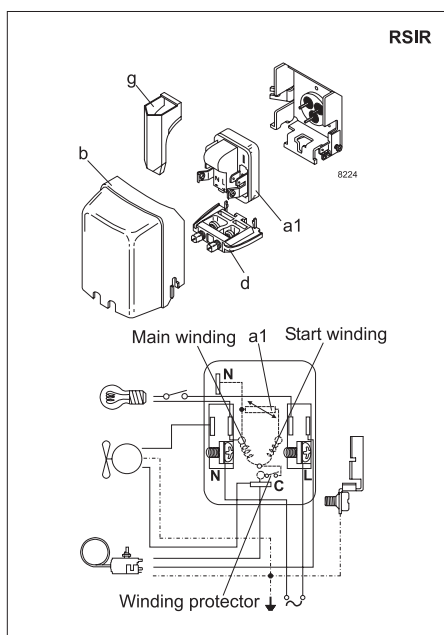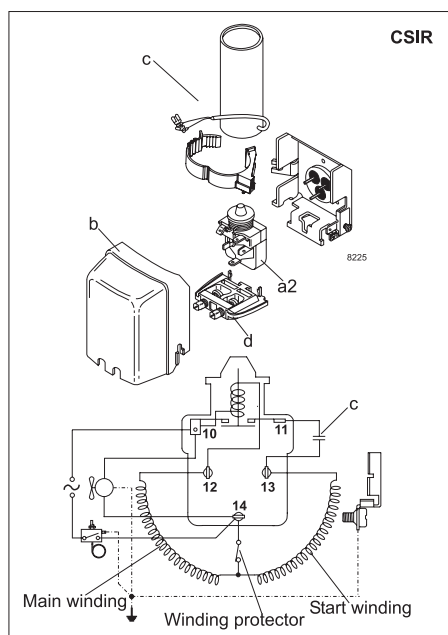

Accessories for	DLE4.8CNT	Figure	Code number
PTC starting device	6.3 mm spade connectors	a1	—
	4.8 mm spade connectors		—
ePTC starting device	4.8 mm spade connectors	a2	103N0050
Starting relay	6.3 mm spade connectors		117U7001
Start. capacitor 60 µF	6.3 mm spade connectors	c	117U5014
Cover		b	103N0491
Run capacitor 5 µF	6.3 mm spade connectors	e	—
(optional)	4.8 mm spade connectors		117-7129
Cord relief		d	103N1010
Protection screen for PTC		g	—

Test conditions	EN 12900		ASHRAE	
	LBP	MBP	LBP	MBP
Condensing temperature	40°C	45°C	54.4°C	54.4°C
Ambient temperature	32°C	32°C	32.2°C	35°C
Suction gas temperature	20°C	20°C	32.2°C	35°C
Liquid temperature	no subcooling		32.2°C	46.1°C

Mounting accessories		Code number
Bolt joint for one comp.	Ø: 16 mm	118-1917
Bolt joint in quantities	Ø: 16 mm	118-1918
Snap-on in quantities	Ø: 16 mm	118-1919

Nidec GA Compressors accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Nidec GA Compressors reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Nidec Global Appliance Germany GmbH. All rights reserved. www.secop.com