

DLE5.7CN
Energy-optimized LBP/MBP Compressor
R290
220-240V 50Hz

General

Code number	102H4653
Approvals	EN 60335-2-34 w. Annex AA
Compressors on pallet	100

Application

Application		LBP/MBP	
Frequency	Hz	50	60
Evaporating temperature	°C	-35 to 7.2	–
Voltage range	V	198 to 254	–
Max. condensing temperature continuous (short)	°C	65 (65)	–
Max. winding temperature continuous (short)	°C	125 (135)	–

Cooling requirements

Frequency	Hz	50			60		
Application		LBP	MBP	HBP	LBP	MBP	HBP
32°C		F ₂	F ₂	—	—	—	—
38°C		F ₂	F ₂	—	—	—	—
43°C		F ₂	F ₂	—	—	—	—
Remarks on application:							

Motor


Motor type		CSIR/RSIR/RSCR	
LRA (rated after 4 sec. UL984), HST LST	A	8.8	7.4
Cut in Current, HST LST	A	8.8	11.9
Resistance, main start winding (25°C)	Ω	13.5	14.3

Design

Displacement	cm ³	5.70
Oil quantity (type)	cm ³	230 (polyolester)
Maximum refrigerant charge	g	150
Free gas volume in compressor	cm ³	1465
Weight without electrical equipment	kg	8.0


Dimensions

Height	mm	A	175
		B	169
		B1	–
		B2	–
Suction connector	location/I.D. mm angle	C	8.2 18°
	material comment	Copper Rubber plug	
Process connector	location/I.D. mm angle	D	6.2 61°
	material comment	Copper Rubber plug	
Discharge connector	location/I.D. mm angle	E	6.2 25°
	material comment	Copper Rubber plug	
Oil cooler connector	location/I.D. mm angle	F	–
	material comment	–	
Connector tolerance	I.D. mm	±0.09	
Remarks:			

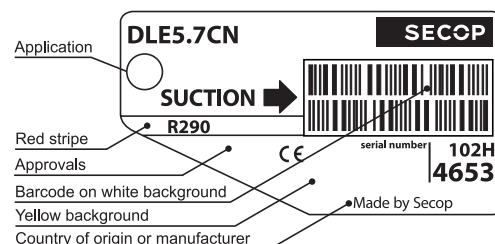

Yellow warning label

S = Static cooling normally sufficient
O = Oil cooling
F₁ = Fan cooling 1.5 m/s
(compressor compartment temperature
equal to ambient temperature)
F₂ = Fan cooling 3.0 m/s necessary
SG = Suction gas cooling normally sufficient
– = not applicable in this area

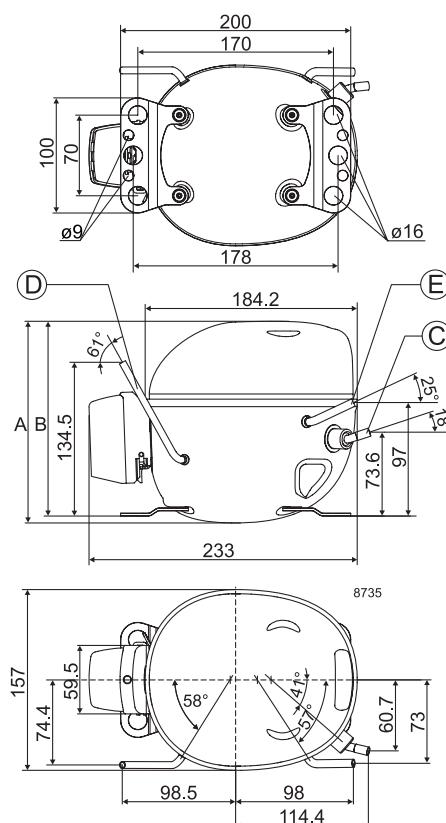

EN 12900 LBP220V, 50Hz, CSIR/RSIR, fan cooling F₂

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10	15	20
Capacity in W			169	215	267	287	328	400	483	547	582	697	832	897			
Power cons. in W			145	162	179	184	194	208	222	230	234	245	256	260			
Current cons. in A			1.13	1.17	1.21	1.23	1.25	1.30	1.34	1.36	1.38	1.42	1.45	1.47			
COP in W/W			1.17	1.33	1.50	1.56	1.69	1.92	2.18	2.38	2.49	2.84	3.25	3.45			

EN 12900 MBP220V, 50Hz, CSIR/RSIR, fan cooling F₂




Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10	15	20
Capacity in W			158	203	252	271	309	376	454	513	546	654	780	841			
Power cons. in W			148	167	184	190	201	218	233	243	248	262	276	281			
Current cons. in A			1.13	1.18	1.23	1.24	1.27	1.32	1.37	1.40	1.42	1.47	1.52	1.54			
COP in W/W			1.07	1.22	1.37	1.42	1.54	1.73	1.95	2.11	2.20	2.49	2.83	2.99			

ASHRAE LBP220V, 50Hz, CSIR/RSIR, fan cooling F₂

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10	15	20
Capacity in W			168	220	277	298	341	415	501	566	603	722	862	930			
Power cons. in W			149	169	188	195	208	227	245	258	264	282	300	308			
Current cons. in A			1.15	1.20	1.26	1.28	1.32	1.38	1.45	1.50	1.52	1.59	1.67	1.70			
COP in W/W			1.12	1.30	1.47	1.53	1.64	1.83	2.04	2.20	2.28	2.56	2.87	3.03			

ASHRAE MBP/HBP220V, 50Hz, CSIR/RSIR, fan cooling F₂

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10	15	20
Capacity in W			150	197	247	266	304	370	447	505	537	643	766	827			
Power cons. in W			148	167	186	193	205	224	243	255	261	279	296	304			
Current cons. in A			1.15	1.20	1.26	1.28	1.32	1.38	1.45	1.50	1.52	1.59	1.67	1.70			
COP in W/W			1.02	1.18	1.33	1.38	1.48	1.65	1.84	1.98	2.06	2.31	2.59	2.72			

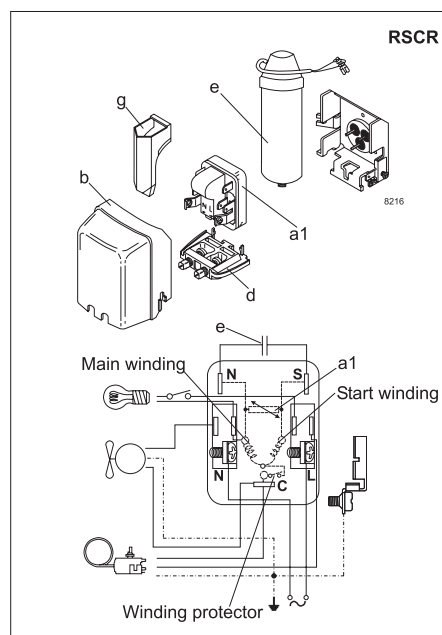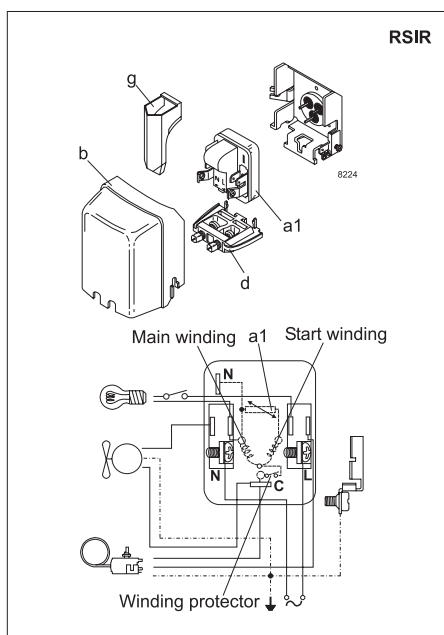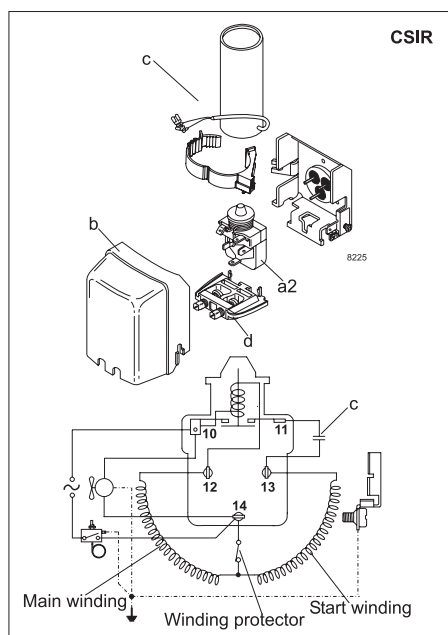

Accessories for	DLE5.7CN	Figure	Code number
PTC starting device	6.3 mm spade connectors	a1	—
	4.8 mm spade connectors		—
ePTC starting device	4.8 mm spade connectors	a2	103N0050
Starting relay	6.3 mm spade connectors		117U7015
Start. capacitor 80 µF	6.3 mm spade connectors	c	117U5015
Cover		b	103N0491
Run capacitor 5 µF	6.3 mm spade connectors	e	—
(optional)	4.8 mm spade connectors		117-7129
Cord relief		d	103N1010
Protection screen for PTC		g	—

Test conditions	EN 12900		ASHRAE	
	LBP	MBP	LBP	MBP
Condensing temperature	40°C	45°C	54.4°C	54.4°C
Ambient temperature	32°C	32°C	32.2°C	35°C
Suction gas temperature	20°C	20°C	32.2°C	35°C
Liquid temperature	no subcooling		32.2°C	46.1°C

Mounting accessories	Code number	
Bolt joint for one comp.	Ø: 16 mm	118-1917
Bolt joint in quantities	Ø: 16 mm	118-1918
Snap-on in quantities	Ø: 16 mm	118-1919

Nidec GA Compressors accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Nidec GA Compressors reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Nidec Global Appliance Germany GmbH. All rights reserved. www.secop.com