



Pump Motors

NEMA

MOTOR MODEL:	GR3-AL-TF-182JM-4-B-D-3
FACTORY TYPE:	TXA

Premium NEMA Cast Aluminum, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	3.0	3.0
Speed, RPM	1760	1455
Voltage	230/460	190/380
# Phase	3	
Full Load Amps	7.62/3.81	8.86/4.43
Power Factor	0.81	-
Nominal Efficiency	89.5	88.4
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
KVA Code	L	J
FL Amps. @ 208 V	8.03	-
Locked Rotor Current	37.7543	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	9	
Connection	YY/Y	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	-	-
75%	-	-
100%	-	-
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	24.0	24.0
3D Image Link		
Not available for this motor		

GENERAL DATA		
Frame Size	182JM	
Frame Enclosure	TEFC	
Mounting	Rigid	
Insulation Class	F	
Duty	Cont. / S1	
NEMA Design	A	
Frame Material	Cast Aluminum	
Ingress Protection	55	
Tropicalization	true	
Cable Entry	1-NPT 3/4"	
Feet Removable	true	
Double Drilled	-	
Paint Color	Graphite Gray	
Paint RAL	7024	
Weight lb	62.0	
MECHANICAL DATA		
DE Bearing	6306ZZ	
NDE Bearing	6206ZZ	
dB No-Load	-	
Rotor Wk ² , Lb-Ft ²	-	
Comp Ring (wavey washer)	NDE	
TORQUE VALUES		
	Torque lb-ft	% FLT
Locked Rotor Torque	22.7661	259.0
Pull-Up Torque	21.7992	248.0
Breakdown Torque	37.0059	421.0
Full Load Torque	8.79	100.0
SITE CONDITIONS		
Ambient Temp °C	40	
Altitude Above Sea Level m	1000	

*This report valid for above Date Code and newer models, please contact Techttop for more info.

Techtop Industries
 2815 Colonnades Court
 Peachtree Corners, GA 30071
 Tel: 678-436-5540
 E-Mail: info@techttopind.com



Pump Motors


NEMA

MOTOR MODEL:	GR3-AL-TF-182JM-4-B-D-3
FACTORY TYPE:	TXA

Premium NEMA Cast Aluminum, TEFC

Non Sinusoidal (VFD) Output 3.0HP, 1760 RPM

Torque Speed (T-n) Curve

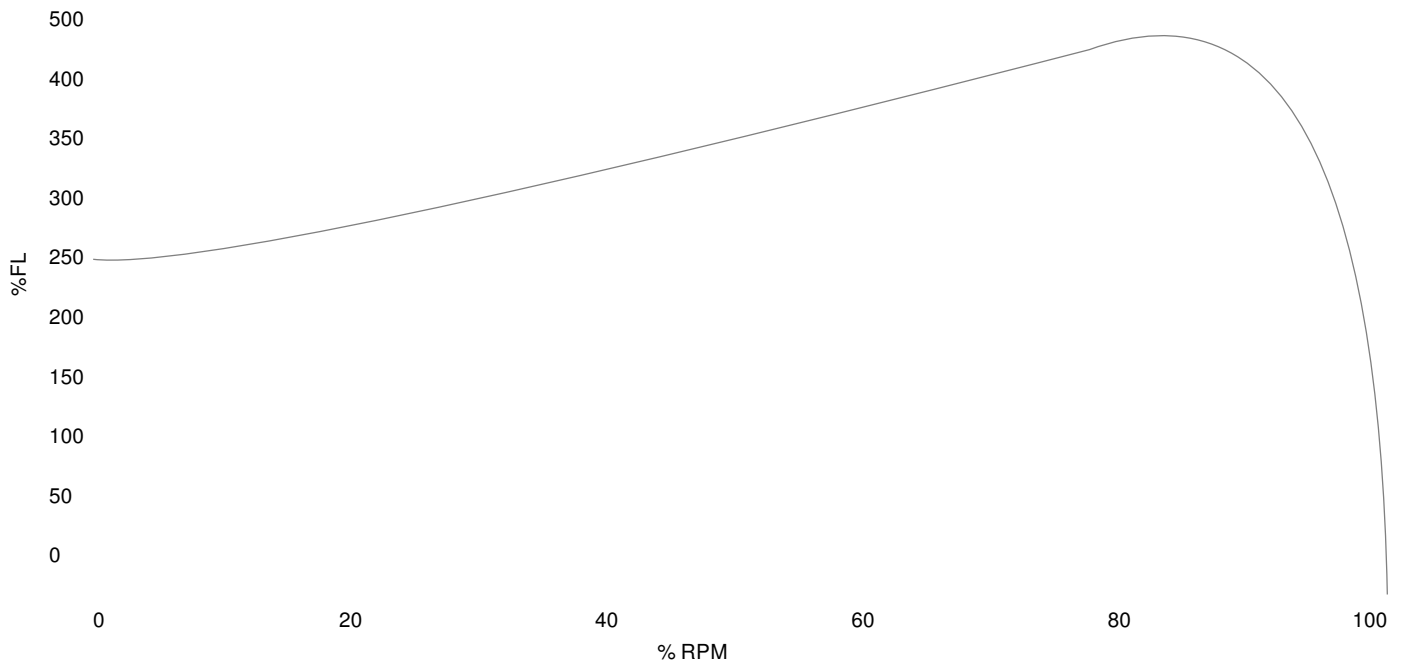

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	22.7661	259.0	Start Configuration
Pull-Up Torque	21.7992	248.0	Starting Current (A)
Breakdown Torque	37.0059	421.0	No-Load Current (A)
Full Load	8.79	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	1.95	-	-	-	-
25	0.75	-	-	-	-	-
50	1.5	-	-	-	-	-
75	2.25	-	-	-	-	-
100	3.0	-	-	-	-	-
125	3.75	-	-	-	-	-

Techtop Industries
 2815 Colonnades Court
 Peachtree Corners, GA 30071
 Tel: 678-436-5540
 E-Mail: info@techttopind.com