



NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	GR3-CI-TF-254T-4-BR-F-15
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	15.0	15.0
Speed, RPM	1760	-
Voltage	575	-
# Phase	3	
Full Load Amps	14.47605942	-
Power Factor	0.81	-
Nominal Efficiency	92.4	-
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
KVA Code	K	-
FL Amps. @ 208 V	-	-
Locked Rotor Current	-	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	6	
Connection	D	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	91.29	0.67
75%	92.52	0.78
100%	92.63	0.84
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	40.0	-
3D Image Link		
<a href="#">GR3-CI-TF-254T-4-BR-F-15</a>		

GENERAL DATA			
Frame Size	254T		
Frame Enclosure	TEFC		
Mounting	Rigid		
Insulation Class	F		
Duty	Cont. / S1		
NEMA Design	A		
Frame Material	Cast Iron		
Ingress Protection	55		
Tropicalization	true		
Cable Entry	1-NPT 1-1/4"		
Feet Removable	true		
Double Drilled	-		
Paint Color	Graphite Gray		
Paint RAL	7024		
Weight lb	278.932		
MECHANICAL DATA			
DE Bearing	6309C3		
NDE Bearing	6309C3		
dB No-Load	-		
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-		
Comp Ring (wavey washer)	DE		
TORQUE VALUES		Torque lb-ft	% FLT
Locked Rotor Torque	130.197	290.0	
Pull-Up Torque	109.994	245.0	
Breakdown Torque	173.745	387.0	
Full Load Torque	44.8954	100.0	
SITE CONDITIONS			
Ambient Temp °C	40		
Altitude Above Sea Level m	1000		

\*This report valid for above Date Code and newer models, please contact Techttop for more info.

Techtop Industries  
2815 Colonnades Court  
Peachtree Corners, GA 30071  
Tel: 678-436-5540  
E-Mail: info@techttopind.com



NEMA Premium


**NEMA**

<b>MOTOR MODEL:</b>	GR3-CI-TF-254T-4-BR-F-15
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

Non Sinusoidal (VFD) Output 15.0HP, 1760 RPM

Torque Speed (T-n) Curve

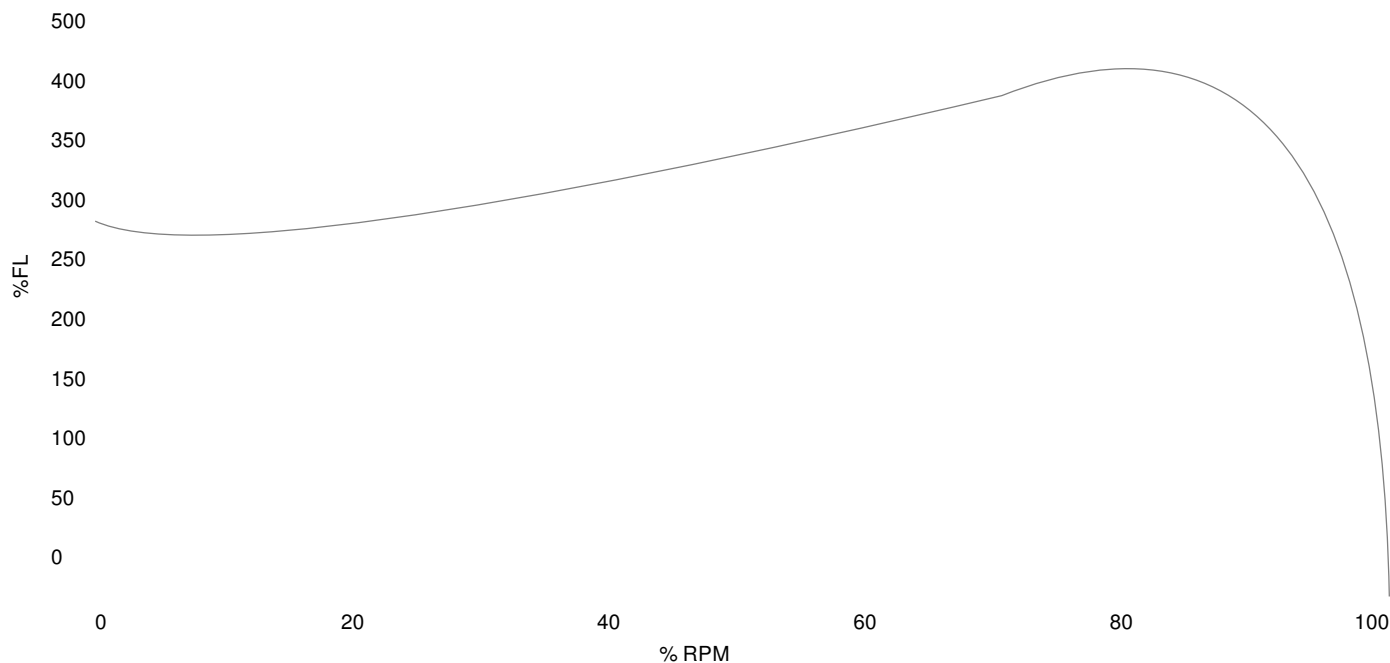

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	130.197	290.0	Start Configuration
Pull-Up Torque	109.994	245.0	Starting Current (A)
Breakdown Torque	173.745	387.0	No-Load Current (A)
Full Load	44.8954	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	8.37	-	-	-	-
25	3.75	9.23	3.28	1794.2	86.19	0.45
50	7.5	11.62	6.19	1788.5	91.29	0.67
75	11.25	14.7	9.16	1782.5	92.52	0.78
100	15.0	18.3	12.2	1776.1	92.63	0.84
125	18.75	22.25	15.31	1769.4	92.25	0.86

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com