



Pump Motors


NEMA

MOTOR MODEL:	GR3-CI-TF-284JM-4-BR-D-25
FACTORY TYPE:	TXC

Premium NEMA Cast Iron, TEFC

Non Sinusoidal (VFD) Output 25.0HP, 1770 RPM

Torque Speed (T-n) Curve

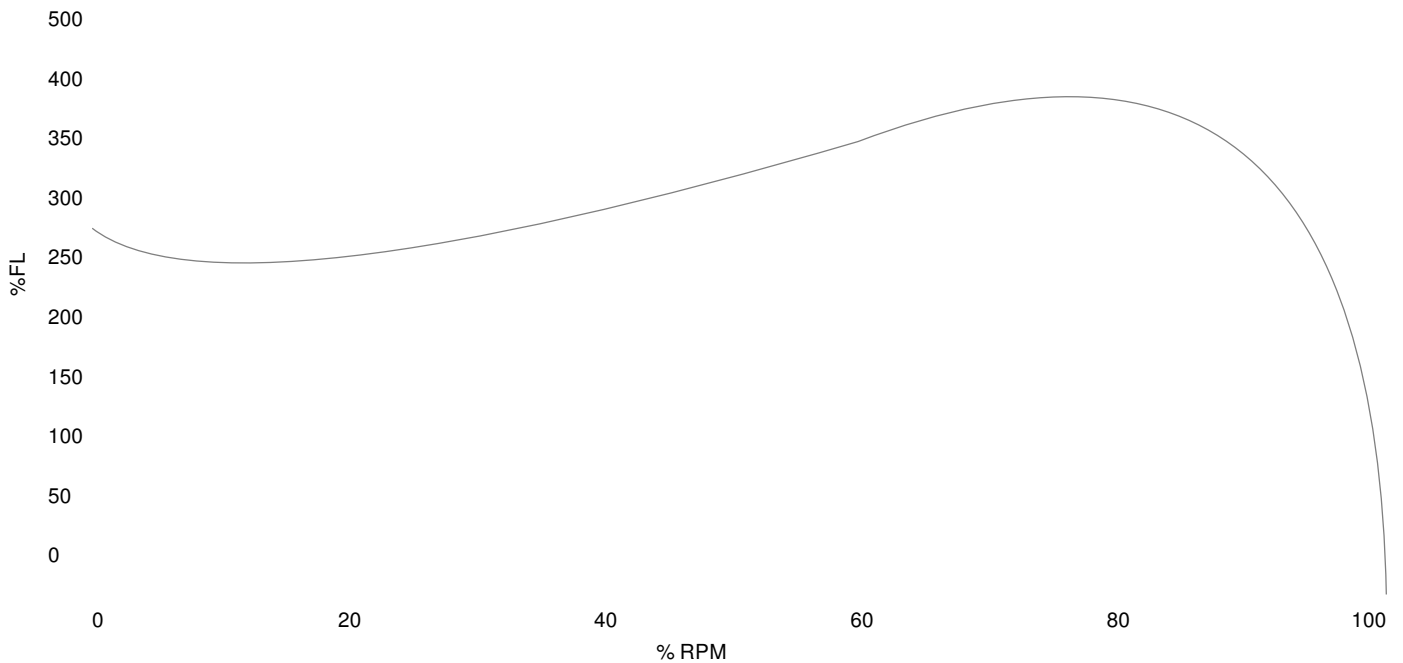

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	209.565	283.0	Start Configuration
Pull-Up Torque	152.546	206.0	Starting Current (A)
Breakdown Torque	259.179	350.0	No-Load Current (A)
Full Load	74.0512	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	11.63	-	-	-	-
25	6.25	11.99	5.36	1793.7	86.79	0.56
50	12.5	17.43	10.15	1788.3	91.59	0.73
75	18.75	22.92	15.03	1782.5	92.84	0.82
100	25.0	28.72	19.99	1776.1	93.05	0.87
125	31.25	35.08	25.06	1769.2	92.77	0.9

Techtop Industries
 2815 Colonnades Court
 Peachtree Corners, GA 30071
 Tel: 678-436-5540
 E-Mail: info@techttopind.com