



NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	GR3-CI-TF-284TS-2-BR-F-25
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	25.0	25.0
Speed, RPM	3550	-
Voltage	575	-
# Phase	3	
Full Load Amps	24.02492844	-
Power Factor	0.89	-
Nominal Efficiency	91.7	-
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
KVA Code	M	-
FL Amps. @ 208 V	-	-
Locked Rotor Current	-	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	6	
Connection	D	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	89.54	0.71
75%	91.42	0.81
100%	91.96	0.86
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	56.0	-
3D Image Link		
<a href="#">GR3-CI-TF-284TS-2-BR-F-25</a>		

GENERAL DATA		
Frame Size	284TS	
Frame Enclosure	TEFC	
Mounting	Rigid	
Insulation Class	F	
Duty	Cont. / S1	
NEMA Design	A	
Frame Material	Cast Iron	
Ingress Protection	55	
Tropicalization	true	
Cable Entry	1-NPT 1-1/2"	
Feet Removable	true	
Double Drilled	-	
Paint Color	Graphite Gray	
Paint RAL	7024	
Weight lb	353.902	
MECHANICAL DATA		
DE Bearing	6311C3	
NDE Bearing	6311C3	
dB No-Load	-	
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-	
Comp Ring (wavey washer)	DE	
TORQUE VALUES		
	Torque lb-ft	% FLT
Locked Rotor Torque	127.93	346.0
Pull-Up Torque	73.5782	199.0
Breakdown Torque	157.509	426.0
Full Load Torque	36.974	100.0
SITE CONDITIONS		
Ambient Temp °C	40	
Altitude Above Sea Level m	1000	

\*This report valid for above Date Code and newer models, please contact Techtop for more info.

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com



NEMA Premium


<b>MOTOR MODEL:</b>	GR3-CI-TF-284TS-2-BR-F-25
<b>FACTORY TYPE:</b>	TXC

**NEMA**

Premium NEMA Cast Iron, TEFC

Non Sinusoidal (VFD) Output 25.0HP, 3550 RPM

Torque Speed (T-n) Curve

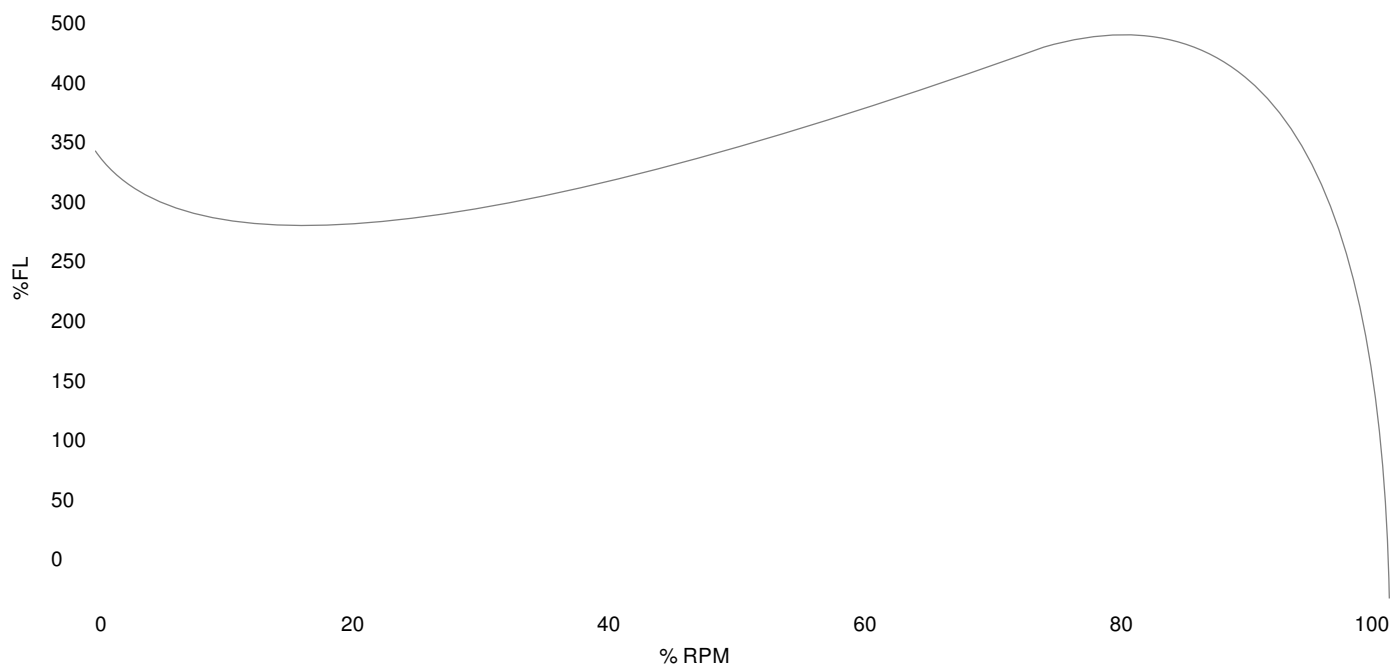

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	127.93	346.0	Start Configuration
Pull-Up Torque	73.5782	199.0	Starting Current (A)
Breakdown Torque	157.509	426.0	No-Load Current (A)
Full Load	36.974	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	12.34	-	-	-	-
25	6.25	13.71	5.6	3591.4	83.02	0.51
50	12.5	18.36	10.39	3582.8	89.54	0.71
75	18.75	23.72	15.26	3573.7	91.42	0.81
100	25.0	29.67	20.23	3564.1	91.96	0.86
125	31.25	36.11	25.3	3554.1	91.91	0.88

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com