



NEMA Premium

NEMA

MOTOR MODEL:	GR3-RS-OP-143T-2-B-D-1
FACTORY TYPE:	-

NEMA Rolled Steel, ODP

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	1.0	-
Speed, RPM	3450	2800
Voltage	230/460	190/380
# Phase	3	
Full Load Amps	2.96/1.48	-
Power Factor	0.78	-
Nominal Efficiency	81.0	-
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
KVA Code	K	G
FL Amps. @ 208 V	3.05	-
Locked Rotor Current	-	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	9	
Connection	YY/Y	
Coil Resistance	7.89	
Date Code	-	
Load	Efficiency %	P.F.
50%	77.15	0.5882
75%	80.9	0.714
100%	81.97	0.7903
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	29.5	44.0
3D Image Link		
GR3-RS-OP-143T-2-B-D-1		

GENERAL DATA		
Frame Size	143T	
Frame Enclosure	ODP	
Mounting	Rigid	
Insulation Class	F	
Duty	Cont. / S1	
NEMA Design	-	
Frame Material	Rolled Steel	
Ingress Protection	23	
Tropicalization	true	
Cable Entry	1-NPT 3/4"	
Feet Removable	-	
Double Drilled	true	
Paint Color	Graphite Gray	
Paint RAL	7024	
Weight lb	-	
MECHANICAL DATA		
DE Bearing	6205ZZ	
NDE Bearing	6203ZZ	
dB No-Load	-	
Rotor Wk², Lb-Ft²	-	
Comp Ring (wavey washer)	NDE	
TORQUE VALUES	Torque lb-ft	% FLT
Locked Rotor Torque	5.32	350.0
Pull-Up Torque	4.71	310.0
Breakdown Torque	6.46	425.0
Full Load Torque	1.52	100.0
SITE CONDITIONS		
Ambient Temp °C	-	
Altitude Above Sea Level m		

*This report valid for above Date Code and newer models, please contact Techtop for more info.

Techtop Industries
2815 Colonnades Court
Peachtree Corners, GA 30071
Tel: 678-436-5540
E-Mail: info@techttopind.com



NEMA Premium


MOTOR MODEL:	GR3-RS-OP-143T-2-B-D-1
FACTORY TYPE:	-

NEMA

NEMA Rolled Steel, ODP

Non Sinusodial (VFD) Output 1.0HP, 3450 RPM

Torque Speed (T-n) Curve

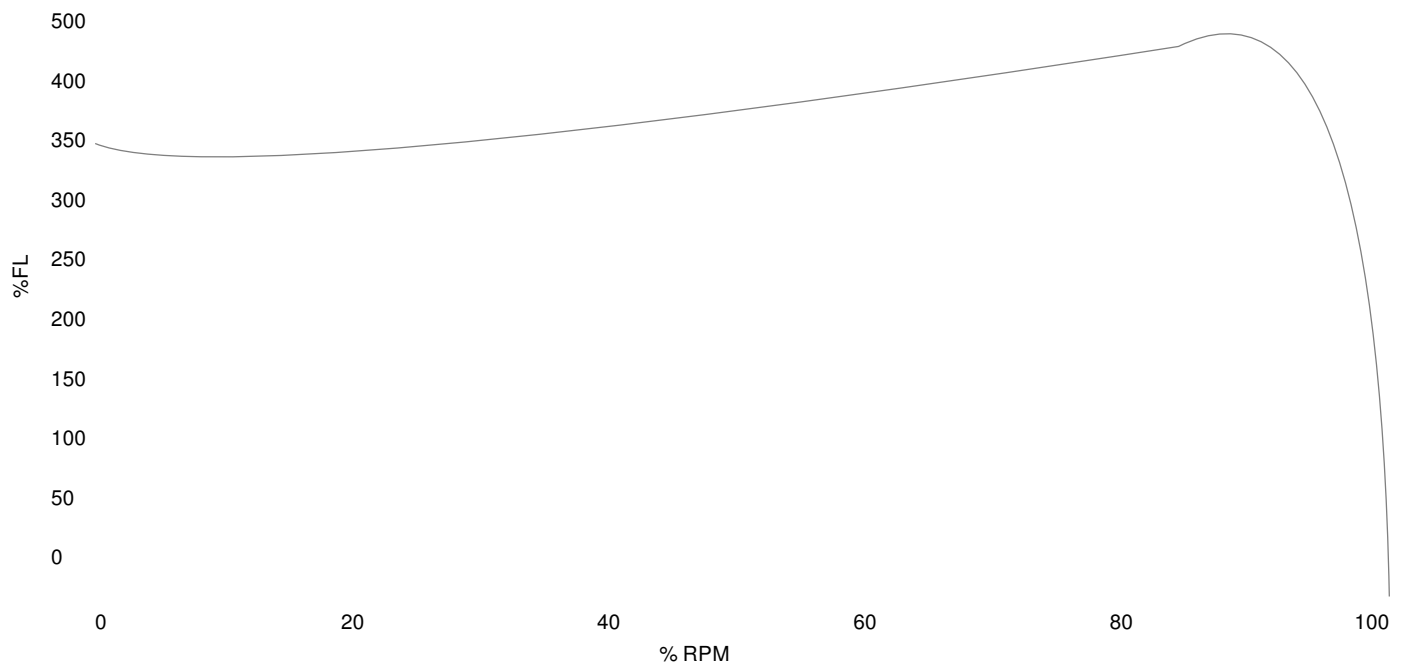

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values	
Locked Rotor Torque	5.32	350.0	Start Configuration	-
Pull-Up Torque	4.71	310.0	Starting Current (A)	-
Breakdown Torque	6.46	425.0	No-Load Current (A)	-
Full Load	1.52	100.0	No-Load Power Factor	-

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	-	-	-	-	-
25	-	-	-	-	-	-
50	-	-	-	-	77.15	0.5882
75	-	-	-	-	80.9	0.714
100	-	-	-	-	81.97	0.7903
125	-	-	-	-	-	-

Techtop Industries
2815 Colonnades Court
Peachtree Corners, GA 30071
Tel: 678-436-5540
E-Mail: info@techttopind.com