

SC10CNX LBP/MBP Compressor R290 220-240V 50Hz

General

Code number	104H8065
Approvals	EN 60335-2-34
Compressors on pallet	80

Application

Application	LBP/MBP			
Frequency	Hz	50		60
Evaporating temperature	°C	-40 to 5		–
Voltage range	V	198 - 254		–
Max. condensing temperature continuous (short)	°C	55 (65)		–
Max. winding temperature continuous (short)	°C	125 (135)		–

Cooling requirements

Frequency	Hz	50			60		
Application		LBP	MBP	HBP	LBP	MBP	HBP
32°C		F ₂	F ₂	–	–	–	–
38°C		F ₂	F ₂	–	–	–	–
43°C		F ₂	F ₂	–	–	–	–
Remarks on application:							

Motor


Motor type	CSR		
LRA (rated after 4 sec. UL984), HST LST	A	13.2	–
Cut in Current, HST LST	A	13.2	–
Resistance, main start winding (25°C)	Ω	7.3	28.8

Design

Displacement	cm ³	10.29
Oil quantity (type)	cm ³	600 (polyolester)
Maximum refrigerant charge	g	150
Free gas volume in compressor	cm ³	1410
Weight without electrical equipment	kg	13.1


Dimensions

Height	mm	A	209
		B	203
		B1	183
		B2	100
Suction connector	location/I.D. mm angle	C	8.2 37°
	material comment		Copper Rubber plug
Process connector	location/I.D. mm angle	D	6.2 37°
	material comment		Copper Rubber plug
Discharge connector	location/I.D. mm angle	E	6.2 37°
	material comment		Copper Rubber plug
Oil cooler connector	location/I.D. mm angle	F	–
	material comment		–
Connector tolerance	I.D. mm		±0.09
Remarks:			

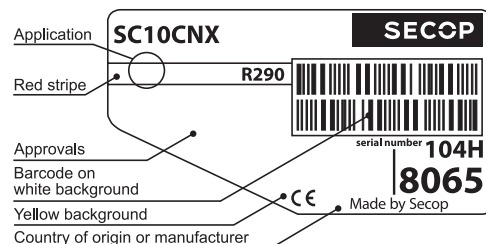

Yellow warning label

- S = Static cooling normally sufficient
- O = Oil cooling
- F₁ = Fan cooling 1.5 m/s (compressor compartment temperature equal to ambient temperature)
- F₂ = Fan cooling 3.0 m/s necessary
- SG = Suction gas cooling normally sufficient
- = not applicable in this area


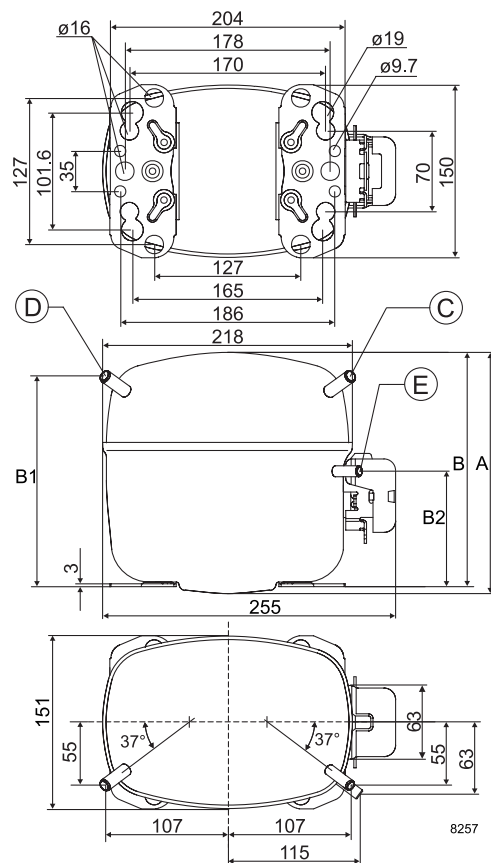


EN 12900 Household (CECOMAF)* 220V, 50Hz, fan cooling F₂

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10	15	20
Capacity in W		126	179	245	325	355	420	531	660	748	809	979	1172				
Power cons. in W		174	208	242	274	285	306	335	362	378	386	406	422				
Current cons. in A		1.12	1.22	1.33	1.44	1.48	1.55	1.66	1.78	1.85	1.89	2.00	2.12				
COP in W/W		0.72	0.86	1.01	1.18	1.25	1.37	1.58	1.82	1.98	2.10	2.41	2.77				

ASHRAE LBP* 220V, 50Hz, fan cooling F₂

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10	15	20
Capacity in W		141	200	273	362	396	468	593	738	839	905	1096	1312				
Power cons. in W		174	208	242	274	285	306	335	362	378	386	406	422				
Current cons. in A		1.12	1.22	1.33	1.44	1.48	1.55	1.66	1.78	1.85	1.89	2.00	2.12				
COP in W/W		0.81	0.96	1.13	1.32	1.39	1.53	1.77	2.04	2.22	2.35	2.70	3.11				

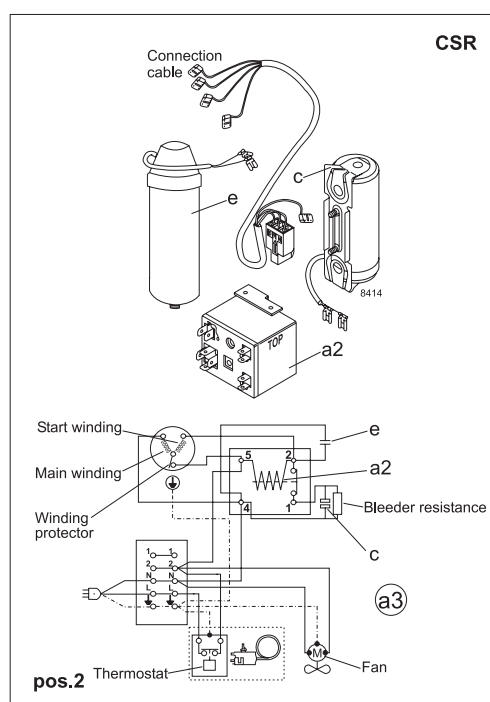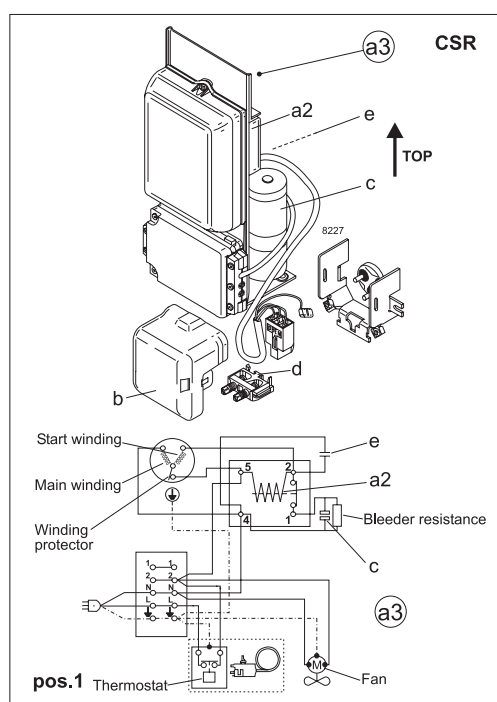

Accessories for	SC10CNX	Figure	Code number
Starting device	550 mm cable length	a3	117-7025
	1000 mm cable length	(pos.1)	117-7014
Starting device (kit)	1500 mm cable length	(pos.2)	117-9719
Starting relay		a2	Components of starting device
Start. capacitor		c	
Run capacitor		e	
Cover		b	
Cord relief		d	103N1004

Test conditions	EN 12900/CECOMAF*	ASHRAE LBP*
Condensing temperature	45°C	45°C
Ambient temperature	32°C	32°C
Suction gas temperature	32°C	32°C
Liquid temperature	no subcooling	32°C

Mounting accessories	Code number	
Bolt joint for one comp.	Ø: 16 mm	118-1917
Bolt joint in quantities	Ø: 16 mm	118-1918
Snap-on in quantities	Ø: 16 mm	118-1919

Nidec GA Compressors accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Nidec GA Compressors reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Nidec Global Appliance Germany GmbH. All rights reserved. www.secop.com