

SC18MLX.3 MBP Compressor R404A/R507 220-240V 50Hz

General

Code number	104L2146
Approvals	EN 60335-2-34
Compressors on pallet	80

Application

Application	MBP			
Frequency	Hz	50		60
Evaporating temperature	°C	-23.3 to 7.2		—
Voltage range	V	198 - 254		—
Max. condensing temperature continuous (short)	°C	50 (60)		—
Max. winding temperature continuous (short)	°C	125 (135)		—

Cooling requirements

Frequency	Hz	50			60		
Application		LBP	MBP	HBP	LBP	MBP	HBP
32°C		—	F ₂	—	—	—	—
38°C		—	F ₂	—	—	—	—
43°C		—	—	—	—	—	—
Remarks on application:							

Motor


Motor type	CSR			
LRA (rated after 4 sec. UL984), HST LST	A	23.6		—
Cut in Current, HST LST	A	23.6		—
Resistance, main start winding (25°C)	Ω	3.4		14.4

Design


Displacement	cm ³	17.68
Oil quantity (type)	cm ³	600 (polyolester)
Maximum refrigerant charge	g	1300
Free gas volume in compressor	cm ³	1460
Weight without electrical equipment	kg	14.0

Dimensions

Height	mm	A	219
		B	213
		B1	193
		B2	110
Suction connector	location/I.D. mm angle	C	10.2 37°
	material comment		Copper Rubber plug
Process connector	location/I.D. mm angle	D	6.2 37°
	material comment		Copper Rubber plug
Discharge connector	location/I.D. mm angle	E	6.2 37°
	material comment		Copper Rubber plug
Oil cooler connector	location/I.D. mm angle	F	—
	material comment		—
Connector tolerance	I.D. mm		±0.09
Remarks:			

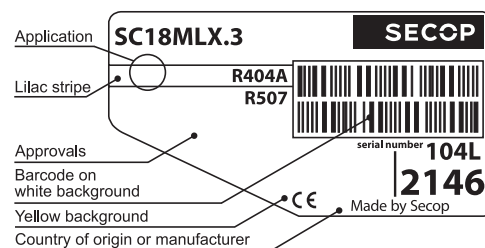

- S = Static cooling normally sufficient
- O = Oil cooling
- F₁ = Fan cooling 1.5 m/s
(compressor compartment temperature equal to ambient temperature)
- F₂ = Fan cooling 3.0 m/s necessary
- SG = Suction gas cooling normally sufficient
- = not applicable in this area

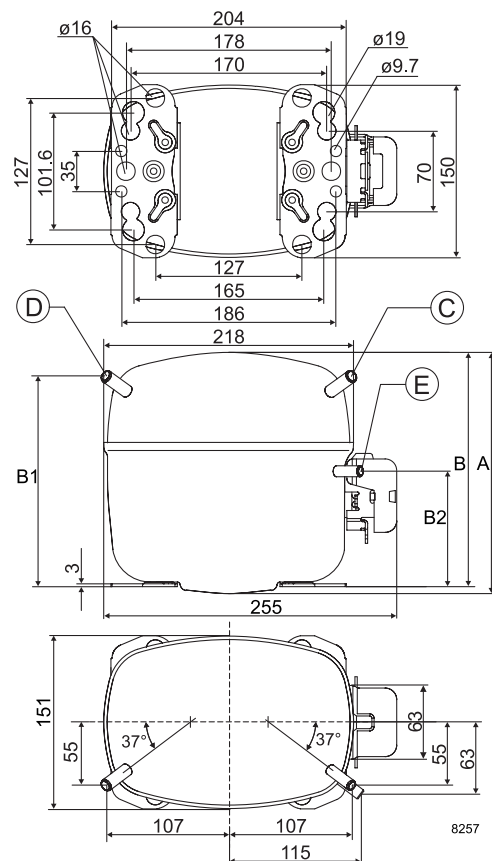


EN 12900 Household (CECOMAF)220V, 50Hz, fan cooling F₂

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10	15	20
Capacity in W						876	1018	1266	1557	1779	1898	2292	2743	2964			
Power cons. in W						677	727	803	878	928	952	1025	1096	1127			
Current cons. in A						3.80	4.00	4.20	4.40	4.60	4.60	4.90	5.12	5.20			
COP in W/W						1.29	1.40	1.58	1.77	1.92	1.99	2.24	2.50	2.63			

ASHRAE MBP220V, 50Hz, fan cooling F₂

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10	15	20
Capacity in W						816	947	1178	1454	1665	1780	2162	2606	2825			
Power cons. in W						716	773	861	949	1008	1038	1126	1215	1254			
Current cons. in A						3.76	3.92	4.17	4.43	4.61	4.70	4.99	5.28	5.42			
COP in W/W						1.14	1.22	1.37	1.53	1.65	1.72	1.92	2.15	2.25			

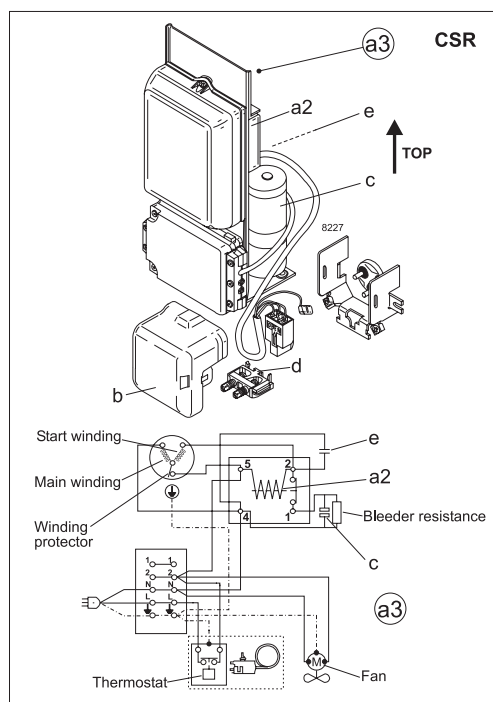

Accessories for	SC18MLX.3	Figure	Code number	Test conditions	EN 12900/CECOMAF	ASHRAE MBP												
Sarting device	550 mm cable length	a3	117-7027	Condensing temperature	45°C	54.4°C												
	650 mm cable length		117-7046	Ambient temperature	32°C	35°C												
	1000 mm cable length		117-7040	Suction gas temperature	32°C	35°C												
Cover		b	103N2009	Liquid temperature	no subcooling	46.1°C												
Starting relay	6.3 mm spade connectors	a2	Components of starting device															
Start. capacitor 80 μF	6.3 mm spade connectors	c		<table><tr><th colspan="2">Mounting accessories</th><th>Code number</th></tr><tr><td>Bolt joint for one comp.</td><td>Ø: 16 mm</td><td>118-1917</td></tr><tr><td>Bolt joint in quantities</td><td>Ø: 16 mm</td><td>118-1918</td></tr><tr><td>Snap-on in quantities</td><td>Ø: 16 mm</td><td>118-1919</td></tr></table>			Mounting accessories		Code number	Bolt joint for one comp.	Ø: 16 mm	118-1917	Bolt joint in quantities	Ø: 16 mm	118-1918	Snap-on in quantities	Ø: 16 mm	118-1919
Mounting accessories		Code number																
Bolt joint for one comp.	Ø: 16 mm	118-1917																
Bolt joint in quantities	Ø: 16 mm	118-1918																
Snap-on in quantities	Ø: 16 mm	118-1919																
Run capacitor 10 μF	6.3 mm spade connectors	e																
Cord relief		d	103N1004															
Cord relief		d	103N1004															

Nidec GA Compressors accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Nidec GA Compressors reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without consequential changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Nidec Global Appliance Germany GmbH. All rights reserved. www.secop.com