




Selection: Semi-hermetic Screw Compressors HS

Input Values

Compressor model	HSN7461-70
Refrigerant	R404A
Reference temperature	Dew point temp.
Evaporating SST	-22,00 °F
Condensing SDT	120,0 °F
Liq. subc. (in condenser)	15,00 °F
Suct. gas superheat	20,00 °F
Operating mode	Standard
Power supply	208V-3-60Hz UL
Useful superheat	100%
Additional cooling	Automatic
Max. discharge gas temp.	175,0 °F

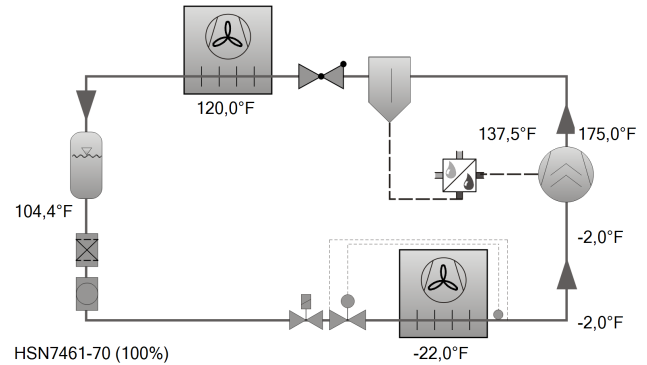


Result

Compressor	HSN7461-70-2PU
Capacity steps	100%
Cooling capacity	211 kBtu/h
Cooling capacity *	180,4 kBtu/h
Evaporator capacity	211 kBtu/h
Power input	64,7 kW
Current (208V)	191,1 A
Voltage range	208-240V
Condenser capacity	353 kBtu/h
COP/EER	3,27
COP/EER *	2,79
Mass flow LP	5024 lb/h
Mass flow HP	5024 lb/h
Operating mode	Standard
Liquid temp.	104,4 °F
Oil volume flow	9,54 GPM
Cooling method	External
Oil cooler outlet	137,5 °F
Oil cooler load	79,2 kBtu/h
Discharge gas temp. w/o cooling	231 °F

Additional cooling/ Limitations (see Limits)!

*with 20°F suction gas superheat, 0°F liquid subcooling

Application Limits Standard

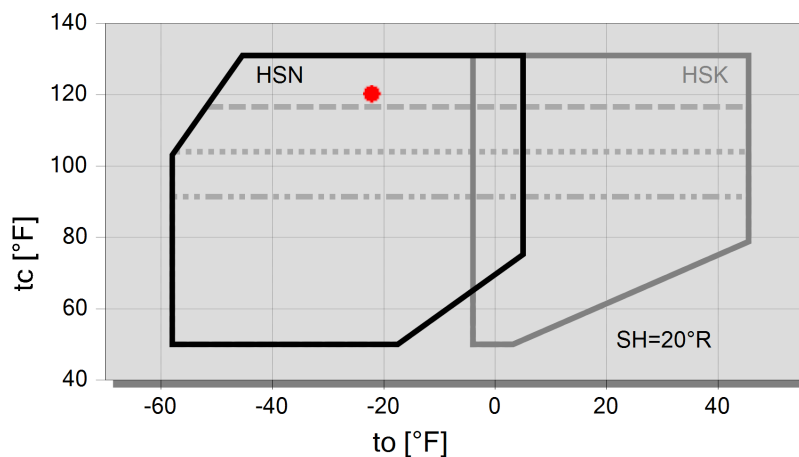


Legend

- max. tc for frequencies = 20Hz
- ... max. tc for frequencies = 25Hz
- max. tc for frequencies = 35Hz
- A



Technical Data: HSN7461-70

Dimensions and Connections

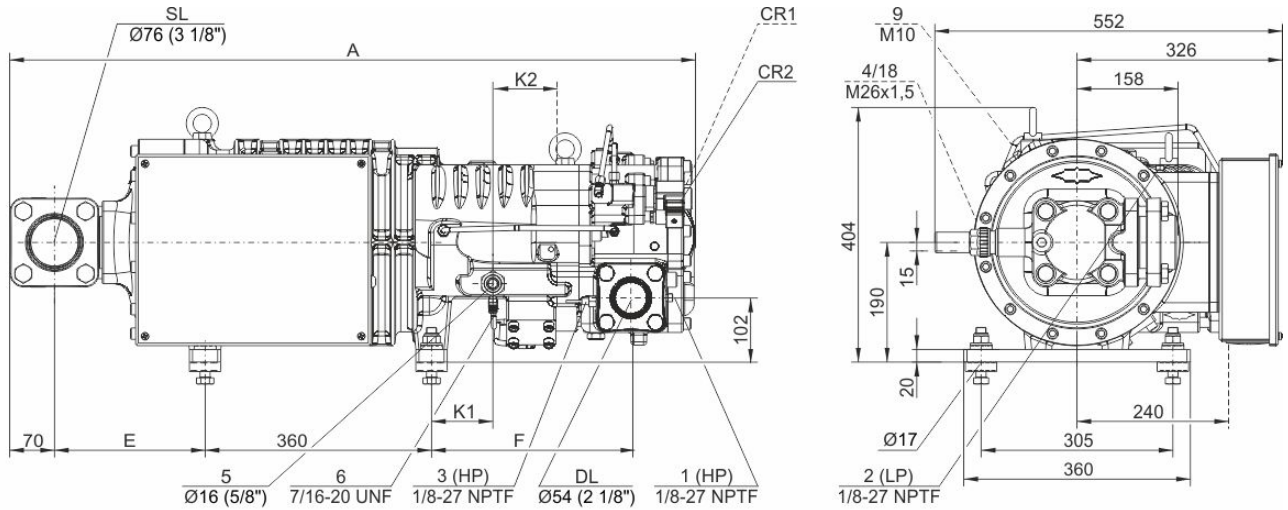

Model	A	E	F	K1	K2
	mm	mm	mm	mm	mm
HS.7451, HS.7461	1021	186	295	76	109
HSK7471-70, HSN7471-75	1034	186	318	98	97
HSK7471-90	1087	238	318	98	97



Technical Data

Technical Data

Displacement (2900 RPM 50 Hz)	129 CFM
Displacement (3500 RPM 60 Hz)	157 CFM
Weight	684 lb
Max. pressure (LP/HP)	275 / 400 psi
Connection suction line	76 mm - 3 1/8"
Connection discharge line	54 mm - 2 1/8"
Adapter/shut-off valve for ECO	22 mm - 7/8" (Option)
Oil type R22	B150SH, B100 (Option)
Oil type R134a/R404A/R507A/R407A/R407F	BSE170
Oil type R448A/R449A/R454C	BSE170

Motor data

Motor version	1
Motor voltage (more on request)	208-240V PW-3-60Hz UL
Max operating current	274.0 A
Starting current (Rotor locked)	607.0 A D / 1015.0 A DD
Max. Power input	90.5 kW

Extent of delivery (Standard)

Discharge gas temperature sensor	Standard
Start unloading	Standard
Oil flow control	SE-B3 (Standard)
Motor protection	SE-E1 (Standard), SE-E3 (Standard for 660-690V)
Suction shut-off valve	Standard
Capacity control	100-75-50% (Standard)
Enclosure class	IP54

Available Options

Discharge shut-off valve	Option
ECO connection with shut-off valve	Option
Motor protection	SE-i1 (200-690V)

Sound measurement

Sound power level (-35°C / 40°C)	89.0 dB(A)
Sound pressure level @ 1m (-35°C / 40°C)	81.0 dB(A)



Semi-hermetic Screw Compressors HS

HSK = Application for air-conditioning and medium temperature cooling.

HSN = Application for low temperature cooling.

Notes regarding application limits (see "Limits")

- * Ranges are valid for standard operation and at full-load conditions.
- * With high pressure conditions, part-load operation is partly limited (see application limits in applications manual SH-100).
- * With Economizer operation the maximum admissible evaporation temperature is shifted by 10K downward (otherwise there is a danger of excessive compression and overload of the motor because of a higher mass flow). At pull-down conditions from higher evaporation temperatures, the ECO injection must remain closed until the evaporation temperature is below the maximum admissible value and a stable operation is achieved (e.g. control of the ECO solenoid valve by means of a low pressure cut-out). The use of the ECO-system with higher evaporation temperatures requires individual consultation with Bitzer.

HS 64/74

- * Capacity control with ECO operation at the same time is limited to one single regulating step (CR 75%). At CR 50% the ECO injection should be closed.

Data for sound emission

Data are based on 50Hz application (IP-units 60Hz) and R404A.

Sound pressure level: values are based on open air test sites with semi-spherical sound emissions at 1 meter distance. For further information see Technical Information "Sound Data".

Legend of connection positions according to "Dimensions":

- 1 High pressure connection (HP)
 - Connection for high pressure switch (HP)
 - 1a Additional high pressure connection (HP)
Not suitable for pressure switch or pressure transmitter!
 - 1b Connection for high pressure transmitter (HP)
- 2 Low pressure connection (LP)
 - Connection for low pressure switch
 - 2a Additional low pressure connection (LP)
 - 2b Connection for low pressure transmitter (LP)
 - 2c Low pressure connection for the minimum pressure differential control valve
- 3 Connection for discharge gas temperature sensor (HP)
- 4 Connection for economiser (ECO)
 - HS.85: ECO valve with connection line (option)
 - OS.85, OS.95, OS.105, HS.95: ECO valve (option)
- 5 Connection/valve for oil injection
- 6 Oil pressure connection
- 7 Oil drain (compressor or motor housing)
 - 7a Oil drain (suction gas filter)
 - 7b Oil drain from shaft seal (maintenance connection)
 - 7c Oil drain hose (shaft seal)
- 8 Threaded bore for foot fastening
- 9 Threaded bore for pipe fixture (ECO and LI lines)
- 10 Maintenance connection for oil filter
- 11 Oil drain (oil filter)
- 13 Oil filter monitoring
- 14 Oil flow switch
- 15 Earth screw for housing
- 16 Pressure blow-off (oil filter chamber)
- 17 Maintenance connection for shaft seal
- 18 Liquid injection (LI)
- 19 Compressor module
- 20 Slider position indicator
- 21 Oil level switch
- 22 Oil pressure transmitter



- 23 Connection for oil and gas return (for systems with flooded evaporator adaptor optional)
- 24 Access to oil circulation restrictor
- 25 Oil inlet for shaft seal cooling
- 26 Oil outlet for shaft seal cooling
- 27 Temperature sensor in the shaft seal
- 28 Vibration sensor connection
- SL Suction gas line
- DL Discharge gas line

Dimensions can show tolerances according to EN ISO 13920-B.