



## General Purpose

# IEC

<b>MOTOR MODEL:</b>	EMUD80a-2
<b>FACTORY TYPE:</b>	-

## IEC Cast Aluminum, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	1.0	1.0
Speed, RPM	3360	-
Voltage	115/230	-
# Phase	1	
Full Load Amps	10.6/5.3	-
Power Factor	0.9	-
Nominal Efficiency	68.4	-
3/4 Load Efficiency	-	-
Service Factor	1.0	-
KVA Code	-	-
FL Amps. @ 208 V	-	-
Locked Rotor Current	-	-
Start Capacitor	-	-
Start Capacitor V	-	-
Run Capacitor	-	-
Run Capacitor V	-	-
Number of Leads	-	-
Connection	-	-
Coil Resistance	-	-
Date Code	-	-
Load	Efficiency %	P.F.
50%	-	-
75%	-	-
100%	-	-
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	-	-
3D Image Link		
Not available for this motor		

GENERAL DATA		
Frame Size	80	
Frame Enclosure	TEFC	
Mounting	B3	
Insulation Class	F	
Duty	Cont. / S1	
NEMA Design	-	
Frame Material	Cast Aluminum	
Ingress Protection	54	
Tropicalization	-	
Cable Entry	Fixed	
Feet Removable	true	
Double Drilled	-	
Paint Color	Graphite Gray	
Paint RAL	7024	
Weight lb	23.0	
MECHANICAL DATA		
DE Bearing	6204-2RS CM	
NDE Bearing	6204-2RS CM	
dB No-Load	-	
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-	
Comp Ring (wavey washer)	DE	
TORQUE VALUES		
	Torque lb-ft	% FLT
Locked Rotor Torque	-	-
Pull-Up Torque	-	-
Breakdown Torque	-	-
Full Load Torque	-	-
SITE CONDITIONS		
Ambient Temp °C	40	
Altitude Above Sea Level m	1000	

\*This report valid for above Date Code and newer models, please contact Techtop for more info.



General Purpose


**IEC**

<b>MOTOR MODEL:</b>	EMUD80a-2
<b>FACTORY TYPE:</b>	-

IEC Cast Aluminum, TEFC

Non Sinusoidal (VFD) Output 1.0HP, 3360 RPM

Torque Speed (T-n) Curve

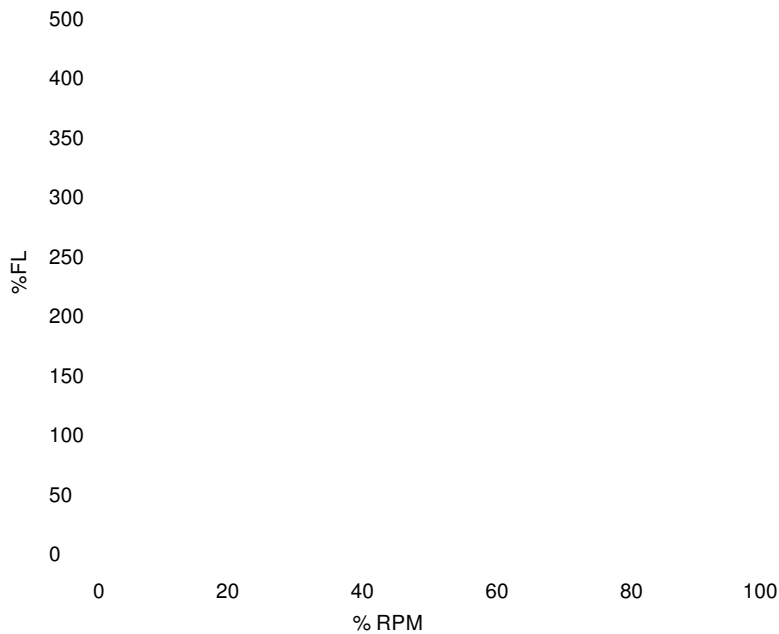

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	-	-	Start Configuration
Pull-Up Torque	-	-	Starting Current (A)
Breakdown Torque	-	-	No-Load Current (A)
Full Load	-	-	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	-	-	-	-	-
25	-	-	-	-	-	-
50	-	-	-	-	-	-
75	-	-	-	-	-	-
100	-	-	-	-	-	-
125	-	-	-	-	-	-