



NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	BR3-CI-TF-444T-4-BR-E-125
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	125.0	125.0
Speed, RPM	1780	1480
Voltage	460	380
# Phase	3	
Full Load Amps	139.4117358	167
Power Factor	0.88	-
Nominal Efficiency	95.4	93.7
3/4 Load Efficiency	-	-
Service Factor	1.15	1.0
KVA Code	K	D
FL Amps. @ 208 V	-	-
Locked Rotor Current	1465.36	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	6	
Connection	D	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	94.33	0.73
75%	95.38	0.83
100%	95.65	0.87
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	70.0	-
3D Image Link		
<a href="#">BR3-CI-TF-444T-4-BR-E-125</a>		

GENERAL DATA			
Frame Size	444T		
Frame Enclosure	TEFC		
Mounting	Rigid		
Insulation Class	F		
Duty	Cont. / S1		
NEMA Design	A		
Frame Material	Cast Iron		
Ingress Protection	56		
Tropicalization	true		
Cable Entry	1-NPT 3"		
Feet Removable	-		
Double Drilled	true		
Paint Color	Graphite Gray		
Paint RAL	7024		
Weight lb	1479.56		
MECHANICAL DATA			
DE Bearing	6319C3		
NDE Bearing	6319C3		
dB No-Load	-		
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-		
Comp Ring (wavey washer)	DE		
TORQUE VALUES		Torque lb-ft	% FLT
Locked Rotor Torque	1294.77	355.0	
Pull-Up Torque	692.977	190.0	
Breakdown Torque	1240.06	340.0	
Full Load Torque	364.724	100.0	
SITE CONDITIONS			
Ambient Temp °C	40		
Altitude Above Sea Level m	1000		

\*This report valid for above Date Code and newer models, please contact Techttop for more info.



NEMA Premium


**NEMA**

<b>MOTOR MODEL:</b>	BR3-CI-TF-444T-4-BR-E-125
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

Non Sinusoidal (VFD) Output 125.0HP, 1780 RPM

Torque Speed (T-n) Curve

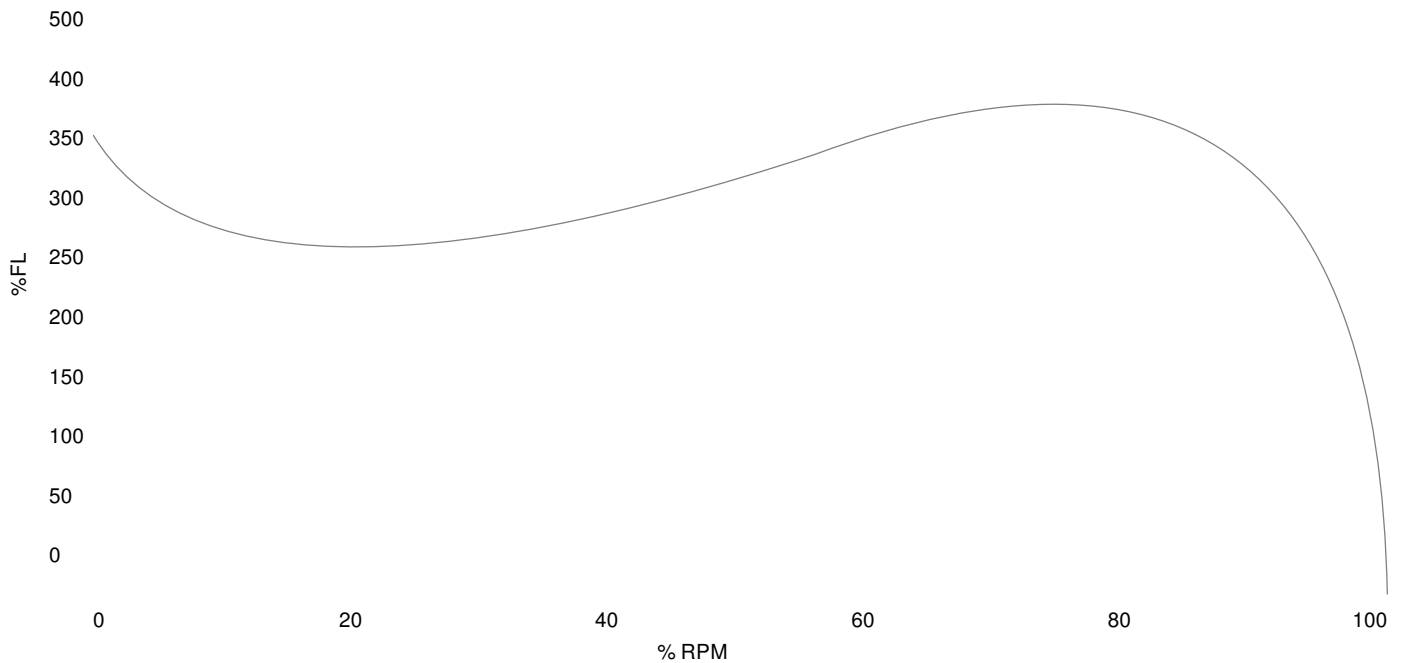

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	1294.77	355.0	Start Configuration
Pull-Up Torque	692.977	190.0	Starting Current (A)
Breakdown Torque	1240.06	340.0	No-Load Current (A)
Full Load	364.724	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	55.58	-	-	-	-
25	31.25	64.5	25.7	1797.7	90.47	0.5
50	62.5	85.06	49.3	1795.2	94.33	0.73
75	93.75	111.22	73.13	1792.7	95.38	0.83
100	125.0	140.92	97.23	1790.0	95.65	0.87
125	156.25	159.57	111.81	1788.3	95.65	0.88

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com