



NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	GR3-CI-TF-365T-4-BR-D-75
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	75.0	75.0
Speed, RPM	1775	1465
Voltage	230/460	190/380
# Phase	3	
Full Load Amps	167.29/83.65	207/103.5
Power Factor	0.87	-
Nominal Efficiency	95.4	92.5
3/4 Load Efficiency	-	-
Service Factor	1.15	1.0
KVA Code	L	F
FL Amps. @ 208 V	-	-
Locked Rotor Current	829.228	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	12	
Connection	DD/D	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	94.91	0.78
75%	95.51	0.85
100%	95.47	0.89
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	62.0	-
3D Image Link		
<a href="#">GR3-CI-TF-365T-4-BR-D-75</a>		

GENERAL DATA				
Frame Size	365T			
Frame Enclosure	TEFC			
Mounting	Rigid			
Insulation Class	F			
Duty	Cont. / S1			
NEMA Design	A			
Frame Material	Cast Iron			
Ingress Protection	55			
Tropicalization	true			
Cable Entry	1-NPT 2"			
Feet Removable	-			
Double Drilled	true			
Paint Color	Graphite Gray			
Paint RAL	7024			
Weight lb	873.18			
MECHANICAL DATA				
DE Bearing	6313C3			
NDE Bearing	6313C3			
dB No-Load	-			
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-			
Comp Ring (wavy washer)	DE			
TORQUE VALUES			Torque lb-ft	% FLT
Locked Rotor Torque	734.712	328.0		
Pull-Up Torque	369.596	165.0		
Breakdown Torque	665.273	297.0		
Full Load Torque	223.998	100.0		
SITE CONDITIONS				
Ambient Temp °C	40			
Altitude Above Sea Level m	1000			

\*This report valid for above Date Code and newer models, please contact Techttop for more info.

Techtop Industries  
2815 Colonnades Court  
Peachtree Corners, GA 30071  
Tel: 678-436-5540  
E-Mail: info@techttopind.com



NEMA Premium


**NEMA**

<b>MOTOR MODEL:</b>	GR3-CI-TF-365T-4-BR-D-75
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

Non Sinusoidal (VFD) Output 75.0HP, 1775 RPM

Torque Speed (T-n) Curve

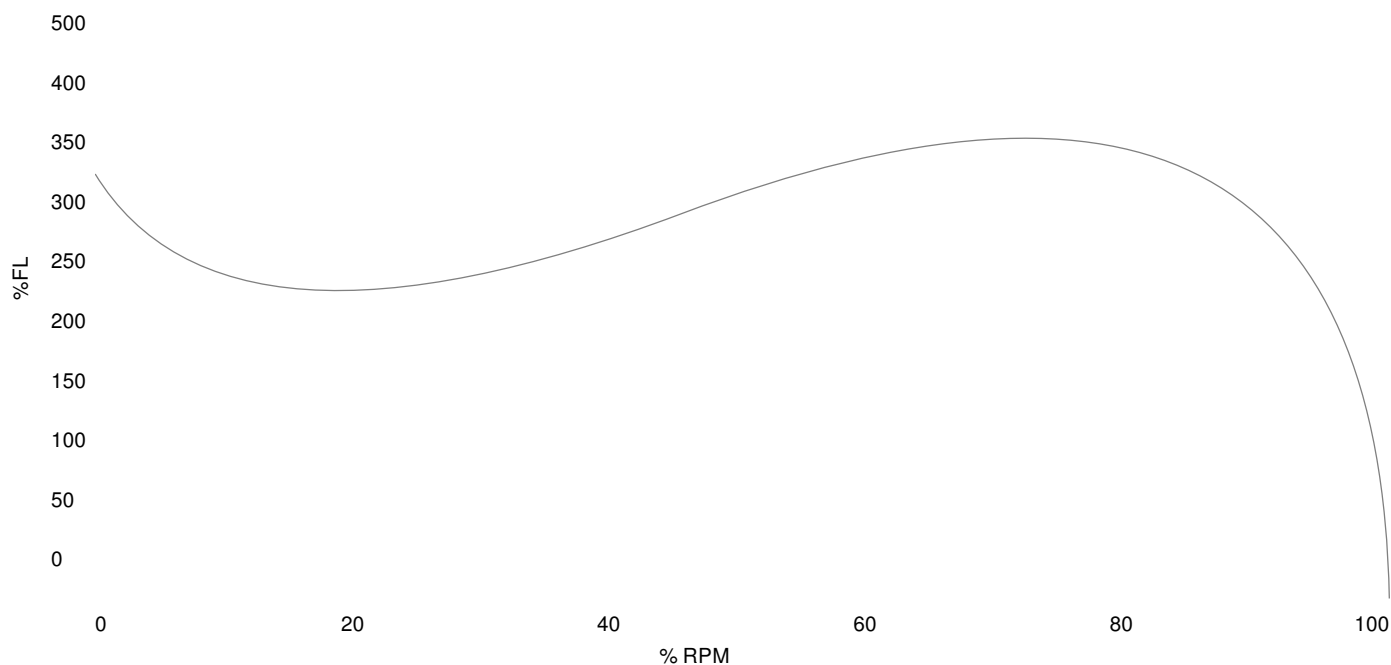

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	734.712	328.0	Start Configuration
Pull-Up Torque	369.596	165.0	Starting Current (A)
Breakdown Torque	665.273	297.0	No-Load Current (A)
Full Load	223.998	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	27.82	-	-	-	-
25	18.75	32.3	15.16	1795.3	92.0	0.59
50	37.5	47.4	29.4	1790.9	94.91	0.78
75	56.25	64.34	43.82	1786.2	95.51	0.85
100	75.0	82.84	58.45	1781.2	95.47	0.89
125	93.75	102.61	73.31	1775.9	95.15	0.9

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com